

Harvest the Sunshine

DEEP BLUE 2.0

Mono

390W MBB Half-Cell Module

JAM60S20-390/MR/1000V Series

Introduction

Assembled with multi-busbar PERC cells, the half-cell configuration of the modules offers the advantages of higher power output, better temperature-dependent performance, reduced shading effect on the energy generation, lower risk of hot spot, as well as enhanced tolerance for mechanical loading.



Higher output power



Lower LCOE



Less shading and lower resistive loss




Better mechanical loading tolerance

Superior Warranty

- 15-year product warranty *
- 25-year linear power output warranty

0.55% Annual Degradation
Over 25 years

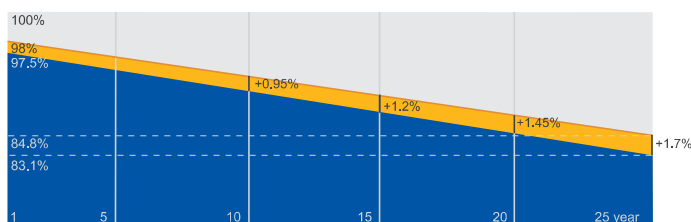

■ New linear power warranty ■ Standard module linear power warranty

Comprehensive Certificates

- IEC 61215, IEC 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- ISO 45001: 2018 Occupational health and safety management systems



JA SOLAR


PSW ENERGY
SOLAR & BATTERY

www.jasolar.com
Specifications subject to technical changes and tests.
JA Solar reserves the right of final interpretation.

Shanghai JA Solar Technology Co., Ltd.



MECHANICAL DIAGRAMS

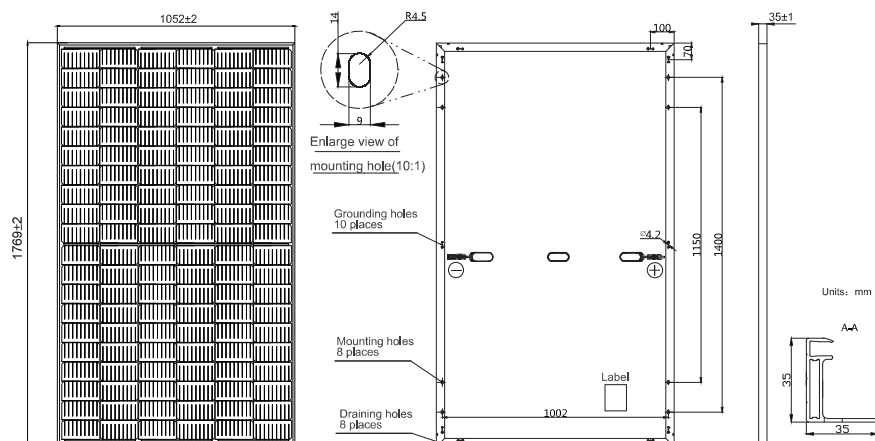

Remark: customized frame color and cable length available upon request

SPECIFICATIONS

Cell	Mono
Weight	20.5kg±3%
Dimensions	1769±2mm×1052±2mm×35±1mm
Cable Cross Section Size	4mm ² (IEC)
No. of cells	120(6×20)
Junction Box	IP68, 3 diodes
Connector	Genuine MC4
Cable Length (Including Connector)	1000mm(+)/1000mm(-)
Country of Manufacturer	China/Vietnam

ELECTRICAL PARAMETERS AT STC

TYPE	JAM60S20-390/MR/1000V
Rated Maximum Power(P _{max}) [W]	390
Open Circuit Voltage(V _{oc}) [V]	41.94
Maximum Power Voltage(V _{mp}) [V]	35.33
Short Circuit Current(I _{sc}) [A]	11.58
Maximum Power Current(I _{mp}) [A]	11.04
Module Efficiency [%]	21.0
Power Tolerance	0~+5W
Temperature Coefficient of I _{sc} (α _{Isc})	+0.044%/°C
Temperature Coefficient of V _{oc} (β _{Voc})	-0.272%/°C
Temperature Coefficient of P _{max} (γ _{Pmp})	-0.350%/°C
STC	Irradiance 1000W/m ² , cell temperature 25°C, AM1.5G


Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.
Measurement tolerance at STC: P_{max} ±3%, V_{oc} ±3% and I_{sc} ±4%.

ELECTRICAL PARAMETERS AT NOCT


TYPE	JAM60S20-390/MR/1000V	OPERATING CONDITIONS
Rated Max Power(P _{max}) [W]	295	Maximum System Voltage 1000V DC
Open Circuit Voltage(V _{oc}) [V]	39.63	Operating Temperature -40°C~+85°C
Max Power Voltage(V _{mp}) [V]	33.20	Maximum Series Fuse 20A
Short Circuit Current(I _{sc}) [A]	9.40	Maximum Static Load, Front 3600Pa, 1.5
Max Power Current(I _{mp}) [A]	8.88	Maximum Static Load, Back 1600Pa, 1.5
NOCT	Irradiance 800W/m ² , ambient temperature 20°C, wind speed 1m/s, AM1.5G	NOCT 45±2°C
		Safety Class Class II

CHARACTERISTICS

Current-Voltage Curve JAM60S20-390/MR/1000V



Power-Voltage Curve JAM60S20-390/MR/1000V



Current-Voltage Curve JAM60S20-390/MR/1000V

